

VG700

FIBER OPTIC VERTICAL GYRO SYSTEM

- Roll and Pitch Angle Measurement in Dynamic Environments
- Fiber Optic Gyro Stability < 20°/hr
- Fully Compensated Angular Rate and Linear Acceleration Outputs
- SAE (Earth Coordinate) Navigation Frame

Applications

- Automotive Testing






VG700AB

The MEMSIC VG700AB is designed specifically for automotive test applications. It combines MEMSIC's third generation high performance fiber optic gyros with the latest in silicon micro-machined (MEMS) accelerometer technology to provide a highly accurate dual function Vertical Gyro (VG) and Inertial Measurement Unit. The new third generation FOG sensor provides excellent bias stability of <20°/hr (constant temp.) and low noise.

The VG700AB is available in two configurations: earth coordinates or body coordinates. The VG700AB-201 provides roll and pitch angle; roll, pitch and yaw angular rate; and X, Y, Z tangential acceleration (earth coordinate) in accordance with SAE Navigation Frame definition. The VG700AB-202 provides roll and pitch angle; roll, pitch and yaw angular rate; and X, Y, Z body-axis acceleration.


The VG700AB consists of three fiber optic rate gyros, three silicon accelerometers, a high-performance DSP and automotive power supply all packaged in one small (6" x 5" x 4") aluminum housing. Fully compensated angular rate and linear acceleration outputs are provided in addition to the roll and pitch angles. Data is available in both analog and digital (RS-232) formats.

Each Inertial System comes with a User's Manual offering helpful hints on programming, installation, and product information. In addition, MEMSIC's GYRO-VIEW software is included to assist you in system development and evaluation, and allows you to perform data acquisition.

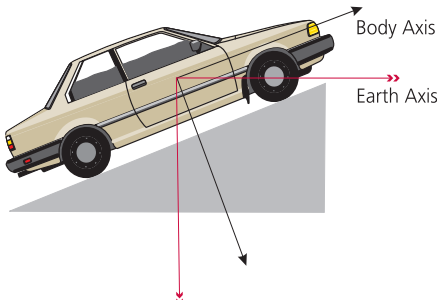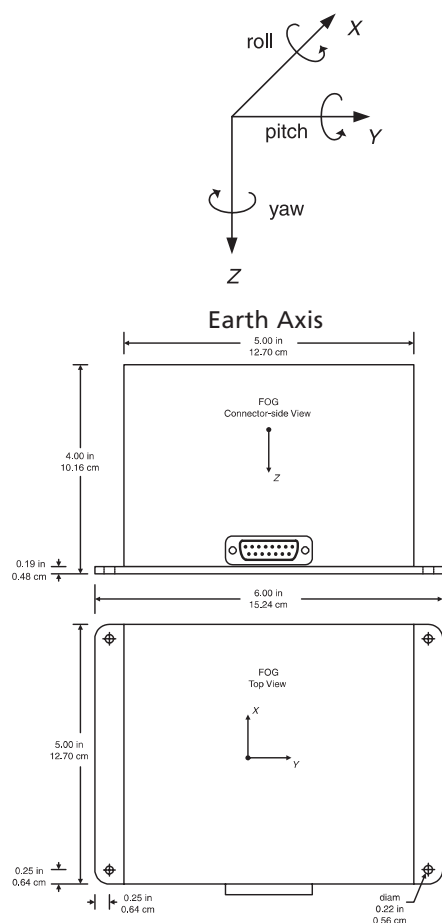

Specifications	VG700AB-201 VG700AB-202	Remarks
Performance		
Update Rate (Hz)	> 100	Continuous Update Mode
Start-up Time Valid Data (sec)	< 1	
Attitude		
Range: Roll, Pitch (°)	± 180, ± 90	
Static Accuracy (° pk-pk)	< 1.5	
Dynamic Accuracy (° rms)	< 2.5	
Resolution (°)	< 0.1	
Angular Rate		
Range: Roll, Pitch, Yaw (°/sec)	± 200	
Bias: Roll, Pitch, Yaw (°/hr)	< ± 20	Constant temp.
Scale Factor Accuracy (%)	< 2	Over temp.
Non-Linearity ¹ (% FS)	< 1	Up to 100 °/sec.
Resolution (°/sec)	< 0.025	
Bandwidth (Hz)	> 100	-3 dB point
Random Walk (°/hr ^{1/2})	< 0.4	
Acceleration		
Range: X/Y/Z (g)	± 4	
Bias: X/Y/Z (mg pk-pk)	< 24	
Scale Factor Accuracy (%)	< 1	
Non-Linearity (% FS)	< 1	
Resolution (mg)	< 0.6	
Bandwidth (Hz)	> 10	-3 dB point
Random Walk (m/s/hr ^{1/2})	< 1.0	
Environment		
Operating Temperature (°C)	-30 to +60	
Non-Operating Temperature (°C)	-55 to +85	
Non-Operating Vibration (g rms)	2	20 Hz - 2 KHz random
Non-Operating Shock (g)	90	1 ms half sine wave
Electrical		
Input Voltage (VDC)	10 to 30	
Input Current (A)		< 0.75
Power Consumption (W)	< 8	At 15V DC
Digital Output Format	RS-232	
Analog ² Range (VDC)	± 4.096	Pins 8, 9, 10, 12, 13, 14
	0 to 5.0	Pins 5, 6, 7
Physical		
Size (in)	5.0 x 6.0 x 4.0	Incl. mounting flanges
(cm)	12.70 x 15.24 x 10.16	Incl. mounting flanges
Weight (lbs)	< 3.5	
(kg)	< 1.6	
Connector	15 pin sub-miniature "D" male	

Notes: [¹ Non-Linearity specified at less than 2% FS over entire range.] [² All DAC analog outputs are fully buffered and are designed to interface directly to data acquisition equipment.] Specifications subject to change without notice

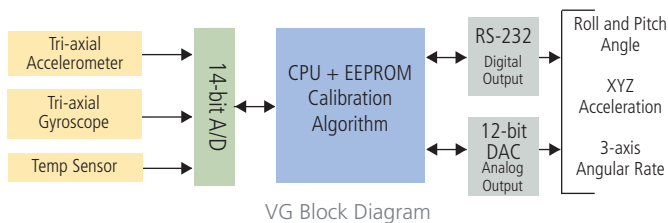


Ordering Information

Model	Description	Gyro (°/sec)	Accel (g)	Axis Coordinates
VG700AB-201	Fiber Optic Vertical Gyro	± 200	± 4	Earth
VG700AB-202	Fiber Optic Vertical Gyro	± 200	± 4	Body

CALL FACTORY FOR OTHER CONFIGURATIONS

This product has been developed exclusively for commercial applications. It has not been tested for, and makes no representation or warranty as to conformance with, any military specifications or its suitability for any military application or end-use. Additionally, any use of this product for nuclear, chemical or biological weapons, or weapons research, or for any use in missiles, rockets, and/or UAV's of 300km or greater range, or any other activity prohibited by the Export Administration Regulations, is expressly prohibited without the written consent and without obtaining appropriate US export license(s) when required by US law. Diversion contrary to U.S. law is prohibited. Specifications are subject to change without notice.

15 Pin "D" Connector Male Pinout



Pin	Function
1	RS-232 Transmit Data
2	RS-232 Receive Data
3	Input Power
4	Ground
5	X-axis accel analog voltage ¹
6	Y-axis accel analog voltage ¹
7	Z-axis accel analog voltage ¹
8	X-axis tangent accel scaled analog voltage ³
9	Y-axis tangent accel scaled analog voltage ³
10	Yaw rate analog voltage ²
11	NC - Factory Use Only
12	Roll angle analog voltage ³
13	Pitch angle analog voltage ³
14	Z-axis tangent accel scaled analog voltage ³
15	NC - Factory Use Only

Notes

- The accelerometer voltage outputs are taken directly from the accelerometers without compensation or scaling. They represent acceleration in body axis coordinates.
- The angular rate analog outputs are scaled to represent degrees/second. These outputs are created by a D/A converter.
- Actual output depends on VG measurement mode. The pinout shown is for angle mode. In angle mode pin 12 is roll angle, pin 13 is pitch angle, pin 8 is X-axis acceleration Nav frame, pin 9 is Y-axis acceleration Nav frame, and pin 14 is Z-axis acceleration Nav frame. See manual for details.

Navigation Frame is defined as the axis system that is in the same plane as the earth coordinate system.

VG700AB-201 Pin Diagram*

*For VG700AB-202 pins 8, 9, 14 output body-frame acceleration in angle mode.